


OVERVIEW

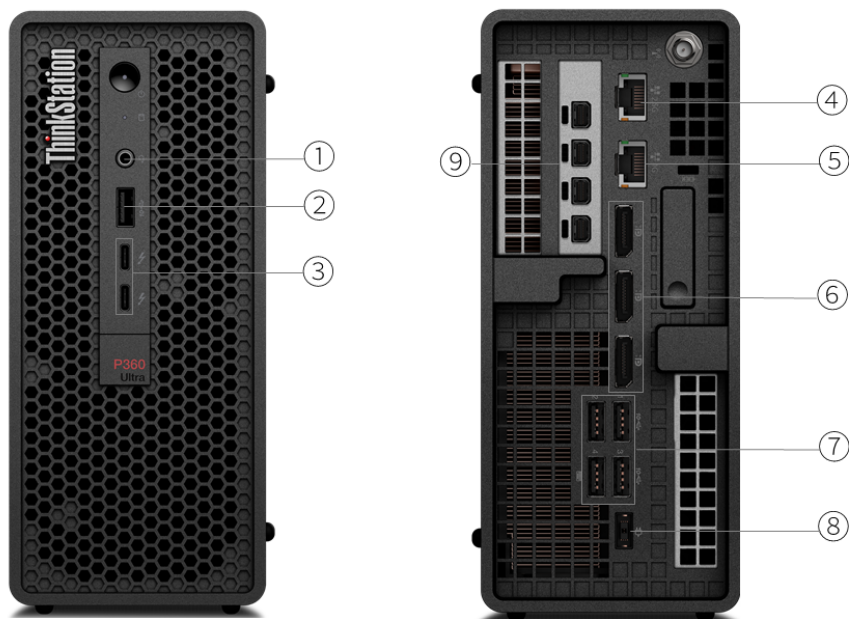

1. Headphone (3.5mm)	6. 3x DisplayPort
2. USB 3.2 Gen 2	7. 4x USB 3.2 Gen 2
3. 2x Thunderbolt 4	8. Power connector
4. Ethernet (2.5GbE RJ-45)	9. Optional ports on expansion cards *
5. Ethernet (GbE RJ-45)	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

12th Generation Intel® Core™ i3 / i5 / i7 / i9 processor, supports processors up to 16 cores; up to 5.2GHz; up to 125W TDP

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-12100	4 (4 P-core + 0 E-core)	8	P-core 3.3GHz	P-core 4.3GHz	12MB	DDR5-4800	Intel UHD Graphics 730
Core i3-12300	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.4GHz	12MB	DDR5-4800	Intel UHD Graphics 730
Core i5-12400T	6 (6 P-core + 0 E-core)	12	P-core 1.8GHz	P-core 4.2GHz	18MB	DDR5-4800	Intel UHD Graphics 730
Core i5-12600	6 (6 P-core + 0 E-core)	12	P-core 3.3GHz	P-core 4.8GHz	18MB	DDR5-4800	Intel UHD Graphics 770
Core i5-12400	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz	18MB	DDR5-4800	Intel UHD Graphics 730
Core i5-12600K	10 (6 P-core + 4 E-core)	16	P-core 3.7GHz / E-core 2.8GHz	P-core 4.9GHz / E-core 3.6GHz	20MB	DDR5-4800	Intel UHD Graphics 770
Core i5-12500	6 (6 P-core + 0 E-core)	12	P-core 3.0GHz	P-core 4.6GHz	18MB	DDR5-4800	Intel UHD Graphics 770
Core i7-12700T	12 (8 P-core + 4 E-core)	20	P-core 1.4GHz / E-core 1.0GHz	P-core 4.6GHz / E-core 3.4GHz	25MB	DDR5-4800	Intel UHD Graphics 770
Core i7-12700K	12 (8 P-core + 4 E-core)	20	P-core 3.6GHz / E-core 2.7GHz	P-core 4.9GHz / E-core 3.8GHz	25MB	DDR5-4800	Intel UHD Graphics 770
Core i7-12700	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.6GHz	25MB	DDR5-4800	Intel UHD Graphics 770
Core i9-12900K	16 (8 P-core + 8 E-core)	24	P-core 3.2GHz / E-core 2.4GHz	P-core 5.1GHz / E-core 3.9GHz	30MB	DDR5-4800	Intel UHD Graphics 770
Core i9-12900T	16 (8 P-core + 8 E-core)	24	P-core 1.4GHz / E-core 1.0GHz	P-core 4.8GHz / E-core 3.6GHz	30MB	DDR5-4800	Intel UHD Graphics 770
Core i9-12900	16 (8 P-core + 8 E-core)	24	P-core 2.4GHz / E-core 1.8GHz	P-core 5.0GHz / E-core 3.8GHz	30MB	DDR5-4800	Intel UHD Graphics 770

Processor Sockets

1x FCLGA1700

Operating System

Operating System**[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 8.6 (certified only, Red Hat Enterprise Linux 8.7 available in late 2022, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, Human Presence Detection, etc.

Graphics

Integrated Graphics**

- Intel UHD Graphics 730
- Intel UHD Graphics 770

Discrete Graphics Support^[1]

Supports up to one NVIDIA® RTX A5500 Laptop GPU

Discrete Graphics Offering**

Graphics	Memory	Power	Connector	SLI / NVLink
Quadro® P1000	4GB GDDR5	50W	4x miniDP 1.4	None
NVIDIA T400	2GB GDDR6	40W	3x miniDP 1.4	None
NVIDIA T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	None
NVIDIA T1000	4GB GDDR6	50W	4x miniDP 1.4	None
NVIDIA T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	None
NVIDIA RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	None
NVIDIA RTX A3000 Laptop GPU	12GB GDDR6	80W	4x miniDP 1.4a	None
NVIDIA RTX A5000 Laptop GPU	16GB GDDR6	115W	4x miniDP 1.4a	None
NVIDIA RTX A5500 Laptop GPU	16GB GDDR6 with ECC	115W	4x miniDP 1.4a	None

Notes:

1. Discrete graphics support may vary by processor selection or power supply wattage.

Monitor Support

Monitor Support

Supports up to 8 independent displays, 4 via onboard ports (3x DP and 2x Thunderbolt™, simultaneously supports 4 display) and 4 via discrete graphics.

Onboard ports support (with max simultaneous displays):

- DP supports up to 4096x2160@60Hz
- Thunderbolt supports up to 5120x2880@60Hz

Discrete graphics ports support (with max simultaneous displays):

- miniDP supports up to 5120x2880@60Hz

Chipset

Chipset

Intel W680 chipset

Memory

Max Memory^[1]

Up to 128GB (4x 32GB DDR5 SO-DIMM)

Memory Type**^[2]

- DDR5-4800 SO-DIMM ECC
- DDR5-4800 SO-DIMM non-ECC

Memory Slots

Four DDR5 SO-DIMM slots, dual-channel capable

Memory Protection

ECC on models with ECC DIMMs and ECC capable processor

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.
2. System comes with DDR5-4800 memory and will run at lower speed due to platform limitations:
4x 32GB or four memory DIMMs with WiFi configurations runs at DDR5-3600;
other configurations run at DDR5-4000.

Storage

Storage Support^[1]

Up to 1x 2.5" HDD + 2x M.2 SSD

- 2.5" HDD up to 1TB

- M.2 SSD up to 4TB each

Storage Type***

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 1TB FIPS	-
M.2 2280 SSD	PCIe® NVMe®, PCIe 4.0 x4 Performance	-	256GB / 512GB / 1TB / 2TB / 4TB	Opal 2.0

Storage Controllers***

Storage Controller	Type	Interface	RAID	Cache
Integrated NVMe controller	Standard	PCIe NVMe	0/1	None
Integrated SATA controller	Standard	SATA 6.0Gb/s	-	None

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC897-Q codec

Speakers

Single speaker

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
170W	Adapter	90%	100V - 240V
230W	Adapter	90%	100V - 240V
300W	Adapter	90%	100V - 240V

DESIGN

Mechanical

Form Factor

Mini-tower (3.9L)

Dimensions (WxDxH)^[1]

87 x 223 x 202 mm (3.43 x 8.78 x 7.95 inches)

Weight^[2]

3.6 kg (7.94 lbs, maximum configuration)

Bays^[3]

1x 2.5" disk bay (optional, comes with disk)

M.2 Slots

- Two M.2 PCIe Gen 4x4 slots (for SSD)
- One M.2 slot (for WLAN)

Expansion Slots

- One PCIe 4.0 x16
- One PCIe 3.0 x8 (x4 lanes)

Notes:

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.
3. 2.5" HDD requires additional bracket

CONNECTIVITY

Network

Onboard Ethernet

Two Ethernet, 2.5GbE + GbE, Intel Ethernet Connection I225-LM and I210-AT, 2x RJ-45, supports Wake-on-LAN

Optional Ethernet

One additional Ethernet adapter support, up to one additional 10 GbE ports

- Gigabit Ethernet, Intel I350-T2, 2x RJ-45, PCIe x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe x1
- 10 Gigabit Ethernet, Marvell AQtion AQN-107, 1x RJ-45, PCIe x4

WLAN + Bluetooth[®]**^[1]

- Intel Wi-Fi[®] 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- Intel Wi-Fi 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- No WLAN and Bluetooth

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

Ports^[1]

Front Ports

- 1x USB 3.2 Gen 2
- 2x Thunderbolt 4
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports^[2]

- 3x DisplayPort™ 1.2
- 4x USB 3.2 Gen 2
- 1x Ethernet (GbE RJ-45)
- 1x Ethernet (2.5GbE RJ-45)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s;
2. For video ports on discrete graphics, please see graphics section

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password
- UEFI Secure Boot
- Self-healing BIOS

MANAGEABILITY

System Management

System Management^{**}^[1]

- Intel vPro® Enterprise with Intel AMT 16
- Intel vPro Enterprise with Intel AMT 16 on wired LAN
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified 9.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo Workstations](#)

- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

