

# UP Workstation SYS-530T-I



More details here

## Key Applications



Entry-Level System for SOHO and SMB, Storage, application and centralized data backup system Applications, IPMI for remote management,

## Key Features

- Supports Intel® Xeon® E-2300 Series Processors;
- PCIe 4.0 Support;
- Dual LAN ports, GbE and dedicated IPMI LAN port;
- 9cm PWM quiet exhaust fan and optional front intake fan;
- 400W 80PLUS Gold Power Supply;



Form Factor	mini-tower Rackmount Enclosure: 184 x 362 x 425mm (7.25" x 14.25" x 16.75") Package: 279 x 508 x 533mm (11" x 20" x 21")
Processor	Support Intel® Xeon® processor E-2300 series and 10th Gen. Pentium® Processors Single Socket Socket H5 LGA 1200 supported TDP up to 95W; Intel® Xeon® E-2300 series and Pentium processor Single Socket LGA 1200 (Socket H5) supported TDP up to 95W;
System Memory	4 DIMM slots Up to 128GB UDIMM, DDR4-3200MHz
Drive Bays	4x 3.5" SATA drive bays 1x PCIe 3.0 x4
Expansion Slots	1 PCIe 3.0 x2 slot(s) 2 PCIe 4.0 x8 slot(s) 1 PCIe 4.0 x4 slot(s)
On-Board Devices	Chipset: Intel® C252 Network Connectivity: 2x 1GbE BaseT with Intel® I210-AT
Input / Output	SATA: 6 SATA (6Gbps) port(s) USB: 4 USB 3.2 Gen 1 port(s) (2 front Type A; 2 rear Type A) 2 USB 2.0 port(s) (2 rear Type A) Video: 1 VGA port(s) Serial Port: 1 COM Port(s) (1 header)

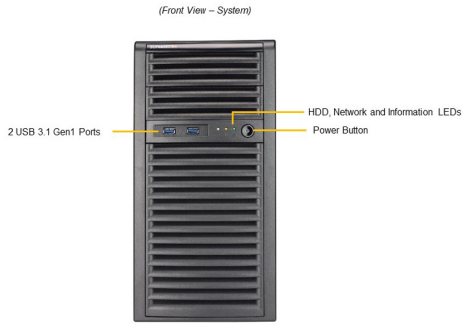

System Cooling	1x 9cm heavy duty fan(s)
Power Supply	400W 80PLUS Gold PS/2 Power Supply Dimension (W x H x L): 140 x 86 x 190 mm Output Type: PS/2
System BIOS	BIOS Type: AMI 256MB SPI Flash
Management	SuperDoctor 5
PC Health Monitoring	Voltage: +1.0V PCH, +1.8V PCH, +12V, +3.3V, +5V, +5V standby, 1.05 (PCH), 3.3V standby, 5 (4-pin), CPU, CPU temperature, CPU thermal trip support, PCH temperature, System temperature, VBAT, VRM temperature Other Features: 8-pin 12v DC power connector, ACPI power management, ATX Power connector, Chassis intrusion header, Control of power-on for recovery from AC power loss, CPU thermal trip support for processor protection, RoHS, Voltage and Frequency Overclocking, WOL
Dimensions and Weight	Height: 14.25" (362 mm) Width: 7.25" (184 mm) Depth: 16.75" (425 mm) Gross Weight: 20 lbs (9.07 kg) Net Weight: 16 lbs (7.26 kg) Packaging: 20" (H) x 11" (W) x 21" (D) Available Color: Black
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super X12STL-F</a>
Chassis	<a href="#">CSE-731I-404B</a>